



## HELENOR VEG-3


- Efficacy 2.56 umol/J or 2.61 umol/J
- SEOUL SEMICONDUCTOR 2835 full spectrum white
- LED driver: Mean Well or cUL certified driver
- Knob dimming+RJ port dimming 0%-100%
- Designed for Veg. stage of medical plants
- 5 years warranty

### Technical Specifications


LED Fixture	HELENOR VEG-3		
	120 Vac	240 Vac	277 Vac
Input Voltage +/- 10%	120 Vac	240 Vac	277 Vac
Typical Input Current	2.7 Amps	1.45 Amps	1.25 Amps
Power Factor	0.99	0.95	0.95
Max. Wattage +/- 5%	320 Watts	320 Watts	320 Watts
Qty. of Light Bars	3 Bars	3 Bars	3 Bars
Light Output PPF	820 $\mu\text{mol/s}$ or 836 $\mu\text{mol/s}$	820 $\mu\text{mol/s}$ or 836 $\mu\text{mol/s}$	820 $\mu\text{mol/s}$ or 836 $\mu\text{mol/s}$

LED Driver	MEANWELL cUL certified	Surge Protection	4KV
LED Brand	Seoul Semiconductor	LED Configuration	5000K/6500K
Dimming	Knob + RJ port	PPE	2.56 $\mu\text{mol/J}$ or 2.61 $\mu\text{mol/J}$
Dimming	0%-100%	Power Cord Length	6' (1.8 M)
IP Rate	IP 66	Max. Ambient Temp.	95°F (35°C)
Warranty	5 Years	Mounting Height	>6" ( Above Canopy )

**Spectrum**

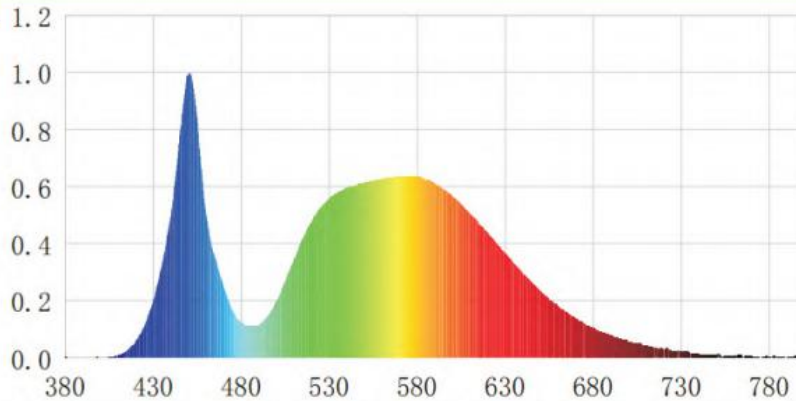

**Dimension & Weight & Package**

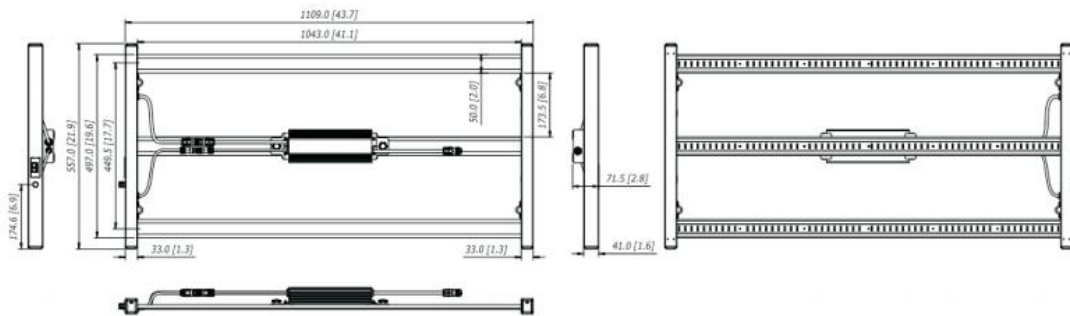

Fixture Dimension:  
1109mm X 557mm X 71.5mm  
(43.67" X 21.93" X 2.81")

Fixture Net Weight:  
4.64 kgs ( 9.28 lbs) Including  
Driver box

HELENOR VEG-3 Luminaire + Driver Box	
Carton Size	118cm X 64cm X 12cm (46.66" X 25.2" X 4.72")
Weight	6.6 kgs (14.55 lbs)
Qty. / Ctn.	1 set