



## HELENOR VEG-4


- Efficacy 2.5  $\mu\text{mol}/\text{J}$
- SEOUL SEMICONDUCTOR 2835 full spectrum white
- LED driver: Mean Well or cUL certified driver
- Knob dimming+RJ port dimming 0%-100%
- Designed for Veg. stage of medical plants
- 5 years warranty

### Technical Specifications


LED Fixture	HELENOR VEG-4		
	120 Vac	240 Vac	277 Vac
Input Voltage +/- 10%	120 Vac	240 Vac	277 Vac
Typical Input Current	4.1 Amps	2.15 Amps	1.9 Amps
Power Factor	0.99	0.95	0.95
Max. Wattage +/- 5%	480 Watts	480 Watts	480 Watts
Qty. of Light Bars	4 Bars	4 Bars	4 Bars
Light Output PPF	1,200 $\mu\text{mol}/\text{s}$	1,200 $\mu\text{mol}/\text{s}$	1,200 $\mu\text{mol}/\text{s}$

LED Driver	MEAN WELL cUL certified	Surge Protection	6KV
LED Brand	Seoul Semiconductor	LED Configuration	5000K/6500K
Dimming	Knob + RJ port	PPE	2.5 μmol/J
Dimming	0%-100%	Power Cord Length	6' (1.8 M)
IP Rate	IP 66	Max. Ambient Temp.	95°F (35°C)
Warranty	5 Years	Mounting Height	>6" (Above Canopy)

**Spectrum**

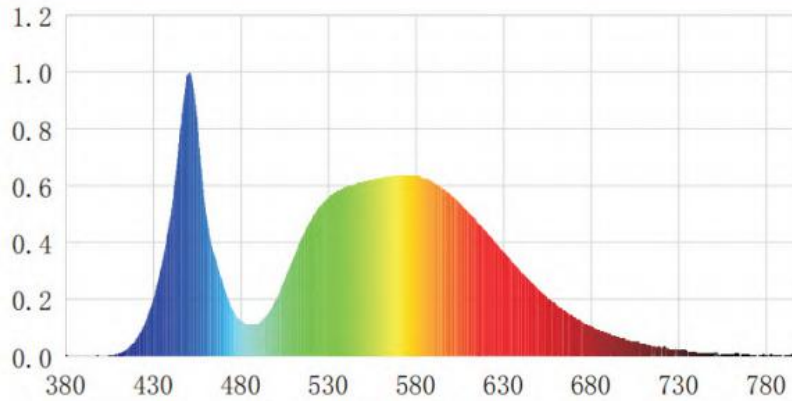

**Dimension & Weight & Package**

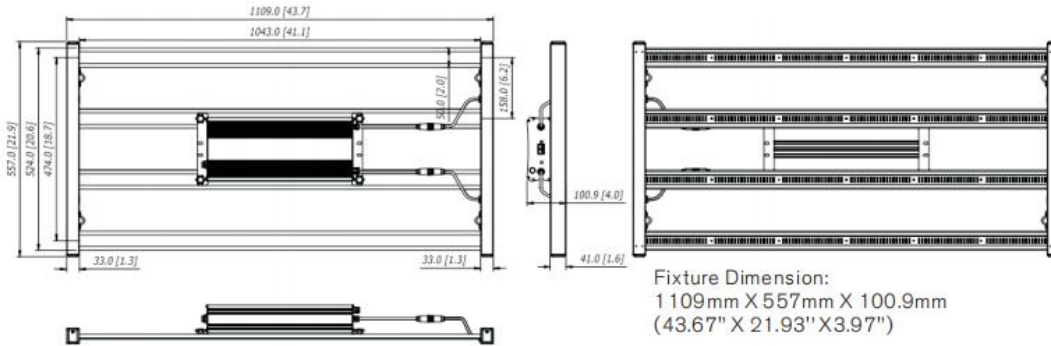

Fixture Dimension:  
1 109mm X 557mm X 100.9mm  
(43.67" X 21.93" X 3.97")

Fixture Net Weight:  
6.9 kgs ( 13.8 lbs) Including  
Driver box

HELENOR VEG-4 Luminaire	
Carton Size	118cm X 64cm X 25cm (46.46" X 25.2" X 9.84")
Weight	10 kgs (22.04 lbs)
Qty. / Ctn.	2 pieces

HELENOR VEG-4 Driver Box	
Carton Size	55cm X 53cm X 17cm (21.65" X 20.87" X 6.69")
Weight	8.4 kgs (18.51 lbs)
Qty. / Ctn.	2 pieces