



## Greenhouse Light 320W


- Ultra-slim design with minimal sunlight obstruction
- Super lightweight construction minimizing the load on greenhouse trusses
- Wide variety of lengths and wattages for different lighting demands
- Manual knob and RJ-14 port dimming
- IP66 water proof
- 5 years warranty




### Specifications

PPF Efficacy ( $\mu\text{mol}/\text{J}$ ) @240Vac	RB1: 3.44 WR6: 2.88
PPF ( $\mu\text{mol}/\text{s}$ )	RB1: 1,100 WR6: 922
Input Voltage	100~277Vac
Max. Input Current	2.86A (120Vac) 1.47A (240Vac) 1.27A (277Vac)
Typical Input Power	320W
Input Surge Protection	DM: 6KV
LED Configuration	450nm+660nm (RB1) 6500K+660nm (WR6)
RJ-14 Port Dimming Range	10%-100% and Dim to Off
Manual Knob Dimming Range	40%   50%   60%   80%   100%   OFF
IP Rating	IP66
Max. Ambient Temp.	40°C (104°F)
Warranty	5 years limited
Mounting Height	>18" (Above Canopy)

### Spectrum (SPD)

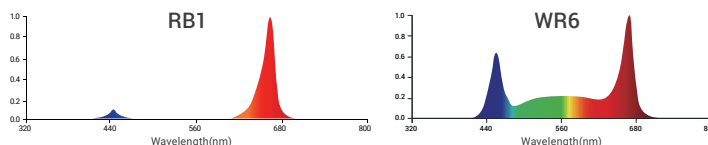

### Dimensions (mm / ")

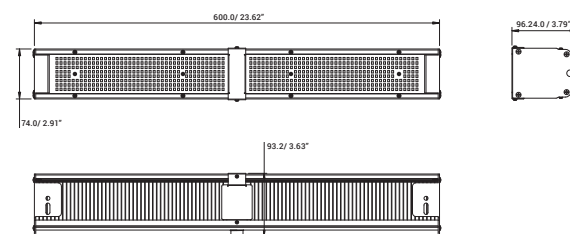

### Packaging

Item	Luminaire	Driver and Cables
Carton Size	60cm × 38cm × 26cm 23.6" × 15" × 10.2"	49cm × 42cm × 27cm 19.3" × 16.5" × 10.6"
Weight	14kg / 30.9lbs	16.5kg / 36.4lbs
Qty./Ctn.	6 Pieces	6 Pieces

