



## Hyper Red Bar

- Built-in driver
- Knob dimming and RJ port dimming
- Daisy-chaining up to 49 lights
- Suspending hooks and plug & play connectors for easy installation
- IP66 rating for water proof
- 5 years warranty




RoHS


### Specifications

Typical Input Power	30W / 50W	
Input Voltage & Frequency	120~277Vac & 50/60Hz	
Max. Input Current	<b>30W</b>	<b>50W</b>
	0.264A (120Vac)	0.44A (120Vac)
	0.139A (240Vac)	0.232A (240Vac)
	0.121A (277Vac)	0.2A (277Vac)
Peak Wavelength	660nm	
Fixture Life Time	>50,000hrs	
Max. Ambient Temp.	40°C (104°F)	
Power Factor	>0.9	
Daisy-chaining (Through Wiring)	<b>30W</b>	<b>50W</b>
	Max. 22 units (120Vac)	Max. 13 units (120Vac)
	Max. 43 units (240Vac)	Max. 25 units (240Vac)
	Max. 49 units (277Vac)	Max. 30 units (277Vac)
Waterproof Rating	IP66	
Power Cord & Plug Type	4ft AWG #18 (NEMA 5-15P)	
Manufacturer's Warranty	5 years limited	

### Spectrum (SPD)

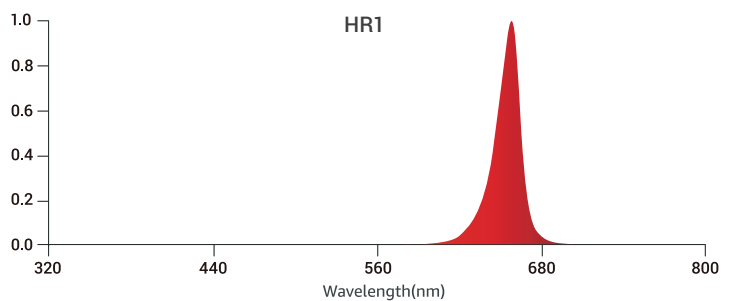

### Dimensions (mm / ")



### Packaging

Carton Size	106cm × 29cm × 22cm 41.7" × 11.4" × 8.7"
Weight	28.91lbs (13.12kg)
Qty./Ctn.	8 units (4 Pairs) Sold per pair

