

**SPECIAL OFFER**



**5 YEAR WARRANTY**

## Top Light 720W


- Folding design and push-lock connectors for quick and easy installation
- 8 passively cooled LED bars for better uniformity of PPFd spread
- Manual knob and RJ-14 port dimming
- IP66 water proof
- 5 years warranty




### Specifications

PPF Efficacy (μmol/J) @240Vac	2.88
PPF (μmol/s)	2,075
Input Voltage	200~277Vac
Max. Input Current	3.16A (240Vac) 2.74A (277Vac)
Typical Input Power	720W
Input Surge Protection	DM: 6KV
LED Configuration	3000K+5000K+660nm
RJ-14 Port Dimming Range	10%-100% and Dim to Off
Manual Knob Dimming Range	40%   50%   60%   80%   100%   OFF
IP Rating	IP66
Max. Ambient Temp.	40°C (104°F)
Warranty	5 years limited
Mounting Height	≥12" (Above Canopy)

### Spectrum (SPD)

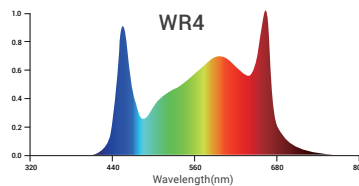

### Dimensions (mm / ")

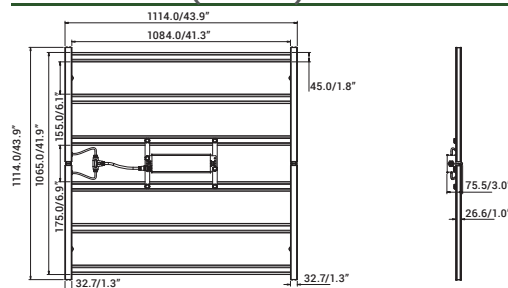

### Packaging

Carton Size	118cm × 63cm × 15cm 46.46" × 24.80" × 5.91"
Weight	23.15 lbs (10.5 kg)
Qty./Ctn.	1 Set

