



## Top Light SMART 670W


- 4 separately controlled channels
- PPF efficacy up to 3.03  $\mu\text{mol}/\text{J}$
- White 6500k & deep red 660nm & UVA 385nm & Far-Red 730nm
- Plug & play connectors for easy and fast connection
- IP66 water proof
- 3 years warranty



### Specifications

Watt Consumption	670W (400W+195W+45W+30W)
Input Voltage	AC120~ 277V
Input Current	5.7A (120Vac) 3.0A (240Vac) 2.6A (277Vac)
Power Factor	>0.95
Spectrum	Adjustable Spectrum
PPF ( $\mu\text{mol}/\text{s}$ )	1,800
Efficacy ( $\mu\text{mol}/\text{J}$ )	3.03 (UVA & Far-Red OFF) 2.69 (UVA & Far-Red ON)
Dimming Range	10%-100% Dim to Off
Dimensions	1114 mm $\times$ 1114 mm $\times$ 102 mm 43.86" $\times$ 43.86" $\times$ 4.04"
Dimming Method	Muanual Knob RJ-14 Ports
IP Rating	IP66
Guarantee	3 years limited
LED Configuration	White 6500k & Deep red 660nm & UVA 385nm & Far-Red 730nm
Power Cord Length	6' (1.8M)
Max Ambient temperature	35°C (95°F)
Fixing Height	6" ~ 18" (Above the canopy)
Control Channels	Channel 1: 400W (White 6500K) Channel 2: 195W (Deep Red 660nm) Channel 3: 45W (UVA 385nm) Channel 4: 30W (Far-Red 730nm)

### Tunable Spectrums (SPD)

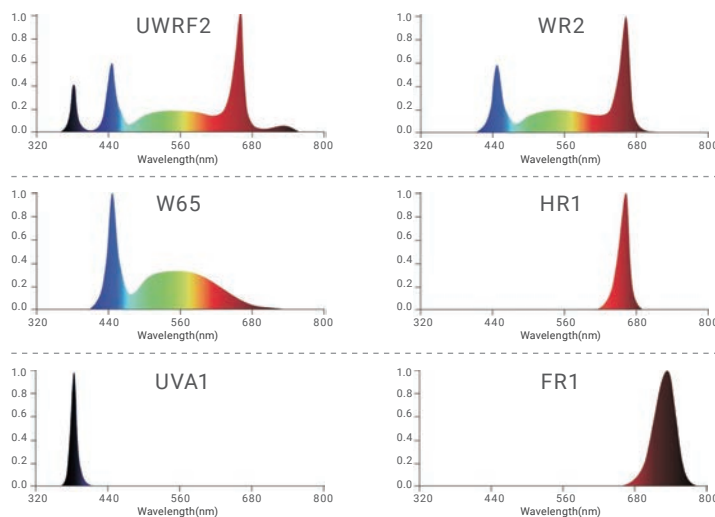

### Dimensions (mm / ")

