

Top Light SMART 840W


- 4 separately controlled channels
- PPF efficacy up to 3.06 $\mu\text{mol}/\text{J}$
- White 6500k & deep red 660nm & UVA 385nm & Far-Red 730nm
- Plug & play connectors for easy and fast connection
- IP66 water proof
- 3 years warranty



Specifications

Watt Consumption	840W (500W+240W+60W+40W)
Input Voltage	AC120~ 277V
Input Current	7.1A (120Vac) 3.7A (240Vac) 3.2A (277Vac)
Power Factor	>0.95
Spectrum	Adjustable Spectrum
PPF ($\mu\text{mol}/\text{s}$)	2,310
Efficacy ($\mu\text{mol}/\text{J}$)	3.06 (UVA & Far-Red OFF) 2.75 (UVA & Far-Red ON)
Dimming Range	10%-100% Dim to Off
Dimensions	1114 mm \times 1114 mm \times 103 mm 43.86" \times 43.86" \times 4.05"
Dimming Method	Muanual Knob RJ-14 Ports
IP Rating	IP66
Guarantee	3 years limited
LED Configuration	White 6500k & Deep red 660nm & UVA 385nm & Far-Red 730nm
Power Cord Length	8' (2.4M)
Max Ambient temperature	35°C (95°F)
Fixing Height	18" ~ 24" (Above the canopy)
Control Channels	Channel 1: 500W (White 6500K) Channel 2: 240W (Deep Red 660nm) Channel 3: 60W (UVA 385nm) Channel 4: 40W (Far-Red 730nm)

Tunable Spectrums (SPD)

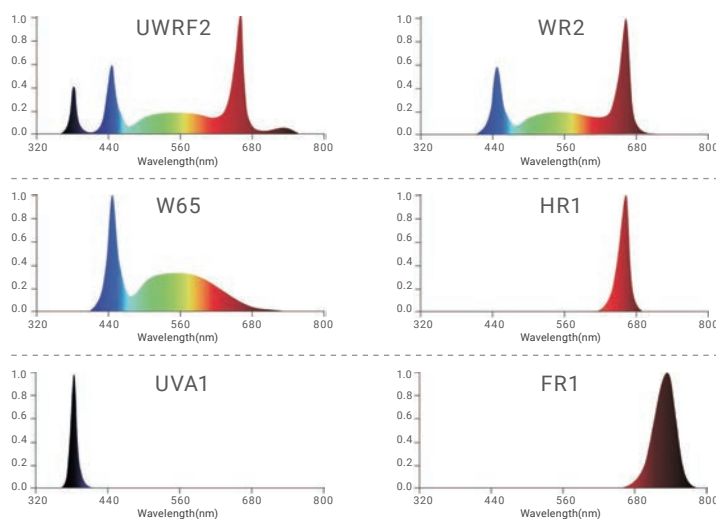

Dimensions (mm / ")

