

SPECIAL OFFER



5 YEAR WARRANTY

Top Light 750W


- Industry-leading price-performance-ratio
- Folding design and push-lock connectors for quick and easy installation
- Manual knob and RJ-14 port dimming
- 5 years warranty




Specifications

PPF Efficacy (μmol/J) @240Vac	2.69
PPF (μmol/s)	1,950
Input Voltage	120~277Vac
Max. Input Current	6.53A (120Vac) 3.28A (240Vac) 2.84A (277Vac)
Typical Input Power	750W (120Vac) 725W (240Vac) 725W (277Vac)
LED Configuration	3000K+5000K+660nm
RJ-14 Port Dimming Range	10%-100% and Dim to Off
Manual Knob Dimming Range	10%-100% and Dim to Off
Max. Ambient Temp.	40°C (104°F)
Warranty	5 years limited
Mounting Height	≥12" (Above Canopy)

Spectrum (SPD)

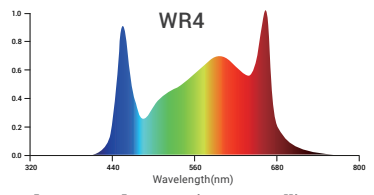

Dimensions (mm / ")

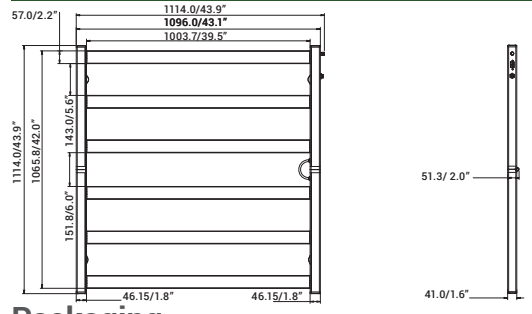

Packaging

Carton Size	118cm × 63cm × 15cm 46.46" × 24.80" × 5.91"
Weight	23.92 lbs (10.85 kg)
Qty./Ctn.	1 Piece