



Under-Canopy Light


- Industry-leading high efficacy: 3.6 $\mu\text{mol}/\text{J}$
- Available with 277-480Vac input
- Max. number of lights sharing one plug or outlet: 45 units



Specifications


PPF Efficacy ($\mu\text{mol}/\text{J}$) @240Vac	R8W: 3.6 or 3.4 R6W: 3.2 or 3.1
PPF ($\mu\text{mol}/\text{s}$)	R8W: 432 or 408 R6W: 384 or 372
Input Voltage	120~277Vac or 277~480Vac
Max. Input Current	1.07A (120Vac) 0.54A (240Vac) 0.47A (277Vac) 0.375A(347Vac) 0.27A(480Vac)
Typical Input Power	120W
LED Configuration	5000k + 660nm
Dimming	RJ-14 Cable
Dimming Range	10% -100% Dim to Off
IP Rating	IP66
Max. Ambient Temp.	40°C (104°F)
Warranty	5 years limited

Spectrum (SPD)

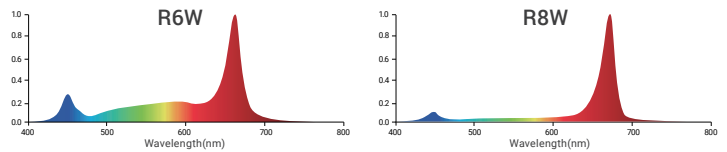

Dimensions (mm / ")

Through-Wiring with AWG#16 Cables

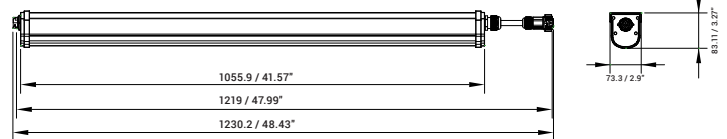

Through-Wiring with AWG#14 or AWG#15 Cables

