

# SQUARE TRI-PROOF LIGHT ZHAGA SOCKET



## Product Information

Square Tri-proof Light is designed in accordance with EPD standards, ensuring easy replacement of the LED board and driver for long-term sustainability. It offers quick wiring and simple installation. Now equipped with a ZHAGA socket, it enables seamless integration with smart sensors and controls for enhanced adaptability. This versatile luminaire is perfect for general indoor applications, providing both efficiency and flexibility.

## Product Feature

- Sustainable Design;
- Quick and Easy Wiring;
- Include Zhaga Socket;
- Easy Replacement of LED Board and Driver;
- Wiring Through Upon Request;
- IP65 & IK08.



IP65



IK08



Zhaga



CASAMBI



Microwave



PIR



Bluetooth




Sustainable

## Datasheet

Product Code	LS040WSTP12Z	LS060WSTP15Z
Dimension	1200 × 74 × 60.5MM	1500 × 74 × 60.5MM
Power Consumption	40W	60W
LED Quantity	140pcs	140pcs
Luminaire Efficacy	140LM / W	140LM / W
Led Spec.	LM80 approved 2835LED	
CCT	4000K / 5000K / 6000K	
CRI	>80	
SDCM	<3	
Beam Angle	120 Degree	
Driver Brand	Lifud Driver	
Input Voltage	AC220 ~ 240V	
Power Factor	>0.95	
IP Rate & IK Rate	IP65 & IK08	
Working Temp	-25°C ~ 45°C	
L90 Lifespan	>50,000 Hours	
Warranty	5 Years	

## Dimensions (mm)

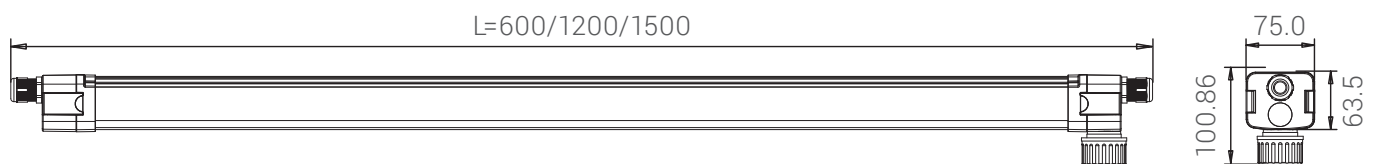

## Packaging

Product Code	LS040WSTP12Z	LS060WSTP15Z
Carton Size	133*38*24CM	163*26*24CM
Weight	11.3KG	9.5KG
Qty./Ctn.	6 Pieces	4 Pieces

## Smart Control

ZHAGA base comes standard, with optional ZHAGA PIR & Microwave sensors, Bluetooth, and Casambi integration. The plug-and-play sensor control simplifies customization, offering easy and flexible options to meet the various lighting control needs.



Microwave Sensor



PIR Sensor



Bluetooth



Casambi

## Mounting Options

