

SMART UFO HIGH BAY ZHAGA SOCKET



Product Information

The Smart UFO High Bay offers exceptional light output and robust mechanical strength, making it an ideal choice for demanding environments. Rated IP65, it withstands tough conditions while delivering up to 180 lm/ W, ensuring outstanding energy efficiency. For enhanced flexibility and cost-effective lighting control, it can be equipped with a Zhaga Socket, making it ready for smart sensor integration.

Product Feature


- Sustainable Design;
- Efficiency upto 180LM/W;
- Include Zhaga Socket;
- Easy Replacement of LED Board and Driver;
- Power Switch optional;
- IP65 & IK08.



Datasheet

Product Code	LS100WHBZ	LS150WHBZ	LS200WHBZ
Dimension	φ240MM	φ280MM	φ320MM
Power Consumption	100W	150W	200W
LED Quantity	336pcs	488pcs	640pcs
Luminaire Efficacy	180LM / W	180LM / W	180LM / W
Led Spec.	LM80 approved 2835LED		
CCT	4000K / 5000K / 6000K		
CRI	>80		
SDCM	<3		
Beam Angle	60/90/120 Degree		
Driver Brand	Lifud Driver		
Input Voltage	AC220 ~ 240V		
Power Factor	>0.95		
IP Rate & IK Rate	IP65 & IK08		
Working Temp	-25°C ~ 45°C		
L90 Lifespan	>50,000 Hours		
Warranty	5 Years		

Dimensions (mm)

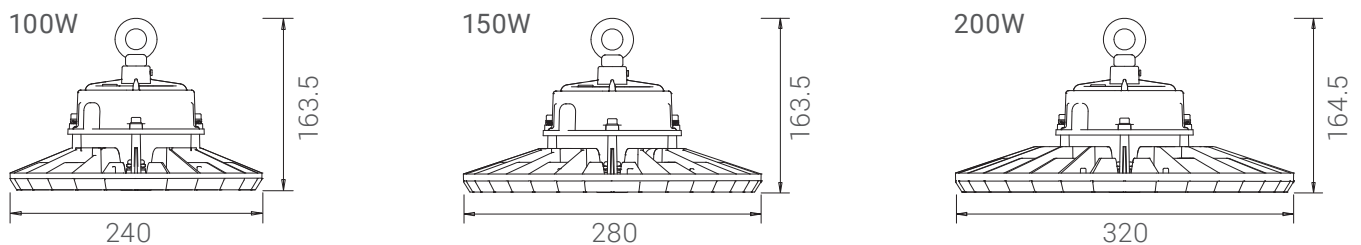

Packaging

Product Code	LS100WHBZ	LS150WHBZ	LS150WHBZ
Carton Size	29*29*17CM	34*34*17.5CM	39*39*18CM
Weight	2KG	2.7KG	3.4KG
Qty./Ctn.	1 Piece	1 Piece	1 Piece

Smart Control

ZHAGA base comes standard, with optional ZHAGA PIR & Microwave sensors, Bluetooth, and Casambi integration. The plug-and-play sensor control simplifies customization, offering easy and flexible options to meet the various lighting control needs.



Microwave Sensor



PIR Sensor



Bluetooth



Casambi

Accessories



Eye bolt



Carabiner hook



Socket set screw



Yoke