



HELENOR VEG-2


- Efficacy 2.43 $\mu\text{mol}/\text{J}$ or 2.46 $\mu\text{mol}/\text{J}$
- Seoul Semiconductor 2835 full spectrum white
- LED driver: MEAN WELL or cUL certified driver
- Knob dimming+RJ port dimming 0%-100%
- Designed for Veg. stage of medical plants
- 5 years warranty

Technical Specifications


LED Fixture	HELENOR VEG-2		
Input Voltage +/- 10%	120 Vac	240 Vac	277 Vac
Typical Input Current	2.05 Amps	1.1 Amps	0.95 Amps
Power Factor	0.99	0.95	0.95
Max. Wattage +/- 5%	240 Watts	240 Watts	240 Watts
Qty. of Light Bars	2 Bars	2 Bars	2 Bars
Light Output PPF	583 $\mu\text{mol}/\text{s}$ or 591 $\mu\text{mol}/\text{s}$	583 $\mu\text{mol}/\text{s}$ or 591 $\mu\text{mol}/\text{s}$	583 $\mu\text{mol}/\text{s}$ or 591 $\mu\text{mol}/\text{s}$

LED Driver	MEAN WELL cUL certified	Surge Protection	4KV
LED Brand	Seoul Semiconductor	LED Configuration	5000K/6500K
Dimming	Knob + RJ port	PPE	2.43 $\mu\text{mol}/\text{J}$ or 2.46 $\mu\text{mol}/\text{J}$
Dimming	0%-100%	Power Cord Length	6' (1.8 M)
IP Rate	IP 66	Max. Ambient Temp.	95°F (35°C)
Warranty	5 Years	Mounting Height	>6" (Above Canopy)

• Spectrum

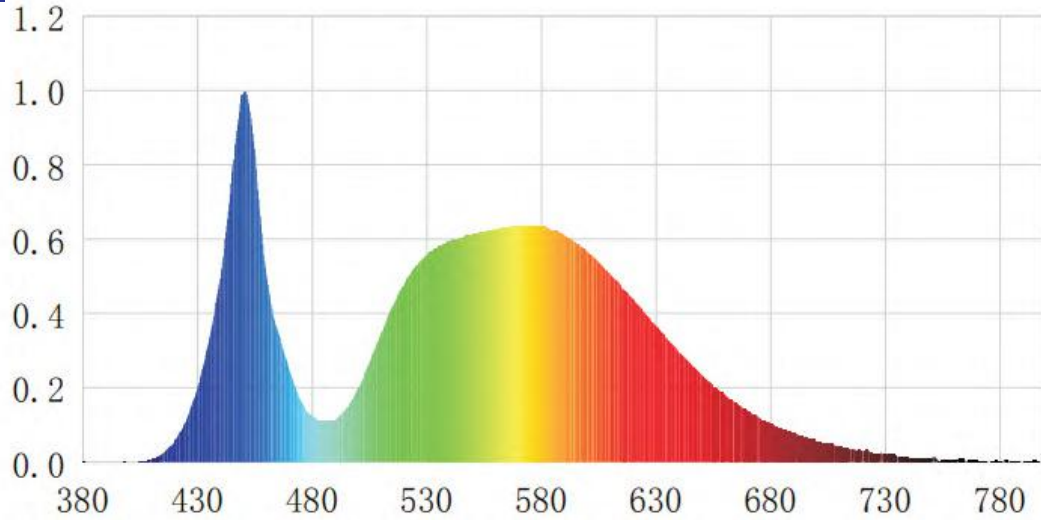

• Dimension & Weight & Package

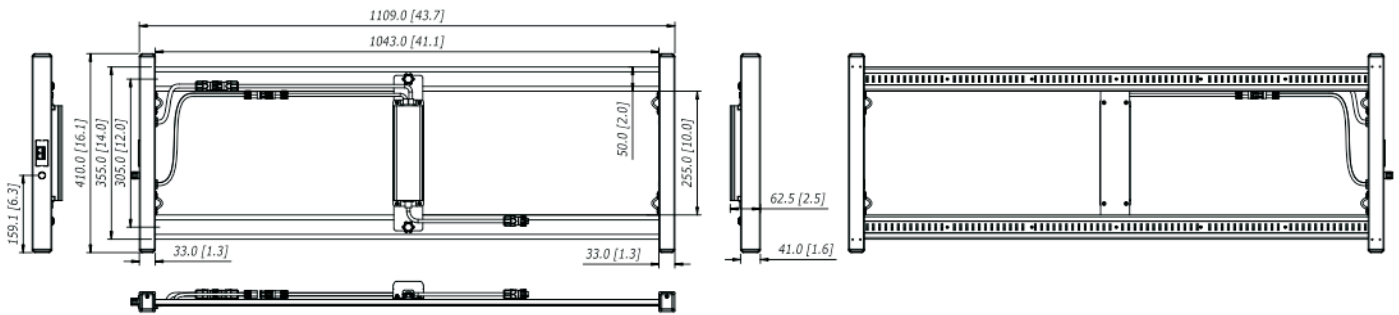

Fixture Dimension:
1109mm X 410mm X 62.5mm
(43.67" X 16.14" X 2.46")

Fixture Net Weight:
3.2 kgs (6.4 lbs) Including
Driver box

HELENOR VEG-2 Luminaire + Driver Box	
Carton Size	118cm X 49cm X 12cm (46.46" X 19.29" X 4.72")
Weight	4.3 kgs (9.48 lbs)
Qty. / Ctn.	1 set