


MAXIMUSTM




LITE SCIENCE[®]

Shenzhen Lite Science Electronics Co., Ltd.

Email: sales@litescience.com

Web.: www.litescience.com



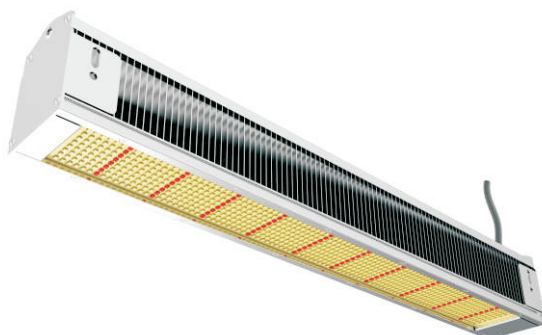


MAXIMUS-2FT

- 2.71 $\mu\text{mol/J}$, 868 $\mu\text{mol/s}$ total output
- SAMUNG LM301B/LM301H, OSRAM 660nm LED
- LED driver : Inventronics
- Knob dimming+RJ port dimming 0%-100%
- Fanless Design
- High Yield: > 2 grams per watt
- Industry leading 5 years warranty

40

Details

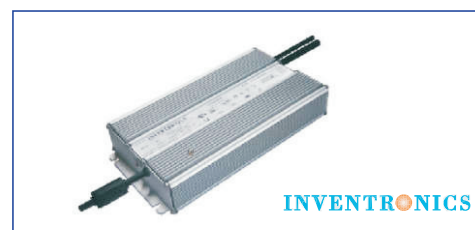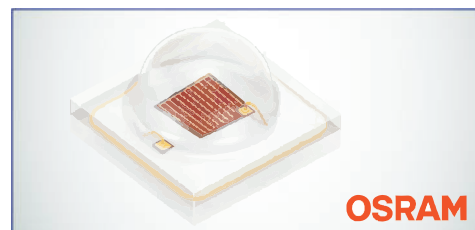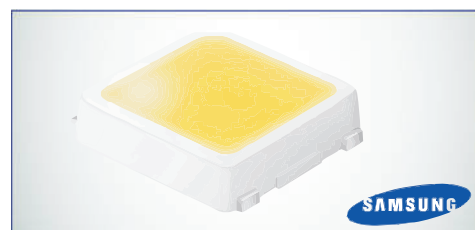


• Technical Specifications

Fixture	MAXIMUS -2FT		
Voltage Option	120V	240V	277V
Plug Type	NEMA 5-15P	NEMA 6-15P	OPEN END CABLE
Input Voltage +/- 10%	120 Volts	240 Volts	277 Volts
Input Wattage +/- 5%	320 Watts	320 Watts	320 Watts
Input current at 100%	2.7 Amps	1.45 Amps	1.25 Amps
Power Factor	0.99	0.95	0.95
Dimension	23.6" X 2.91" X 3.76"(L 60 X W 7.4X H 9.55CM)		


LED Driver	INVENTRONICS	LED Configuration	4000K & 660nm
Surge Protection	4KV	LED Brand	SAMSUNG & OSRAM
Dimming	Knob dimming	Beam Angle	110 Degree
Dimming	RJ 14 port	PPF	868 $\mu\text{mol/s}$
Power Cord Length	6' (1.83M)	PPE	2.71 $\mu\text{mol/J}$
Max. Ambient Temp.	95°F/35°C	Warranty	5 Years

• Spectrum

MAXIMUS-2FT
4000K+660nm

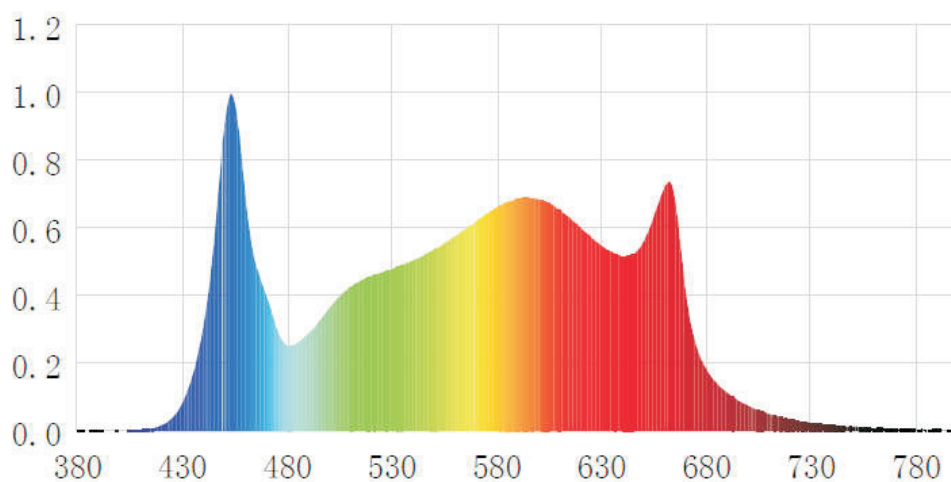


•Knob+RJ14 Port dimming

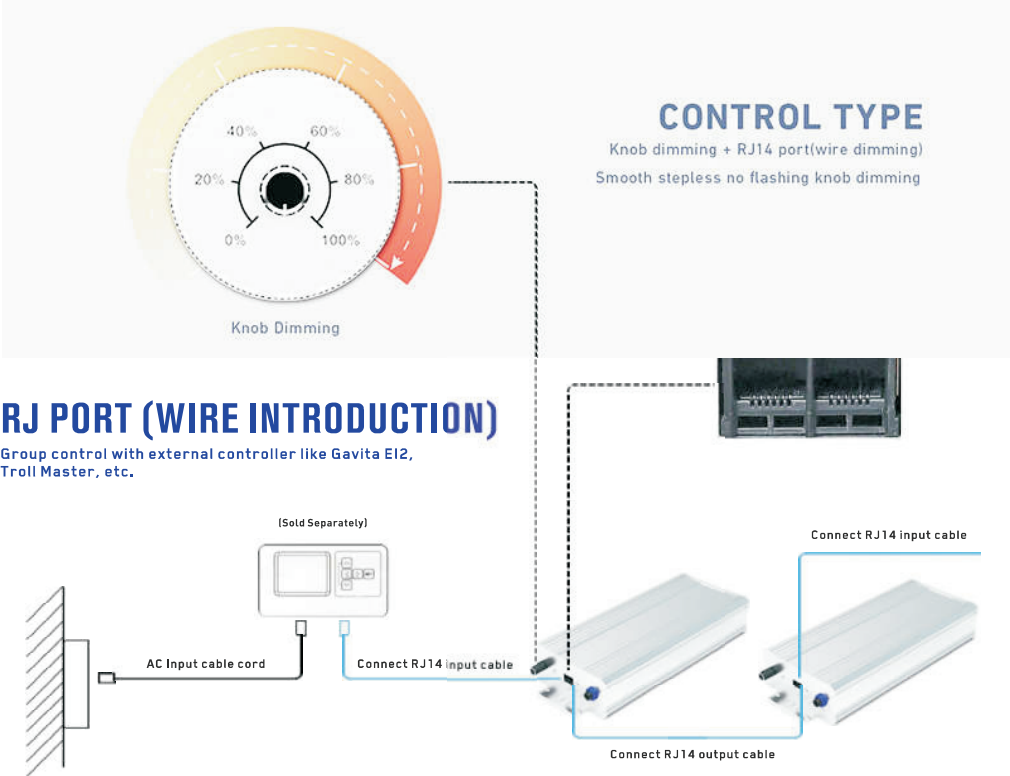


• Dimension & Weight

42



Fixture Dimension:
(L) 60cm X (W) 7.4cm X (H) 9.55cm
(23.6" X 2.91" X 3.76")

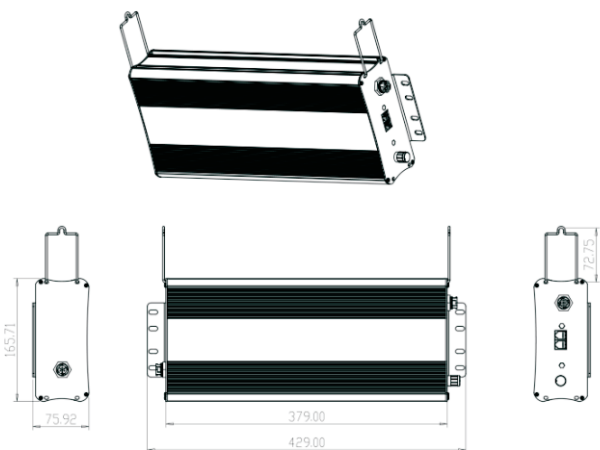

Power Supply Dimension:
(L) 43cm X (W) 17cm X (H) 7.6cm
(16.93" X 6.69" X 2.99")

Power Supply Weight:
8.6lb/3.9kg (320W)

• Package

Luminaire (Maximus-2FT)		Driver Box (Maximus-2FT)	
Carton Size	69cm X 26cm X 19cm 27.17" X 10.24" X 7.48"	Carton Size	55cm X 53cm X 18cm 21.65" X 20.87" X 7.09"
Weight	5.1 kgs (11.24 lbs)	Weight	9 kgs (19.83 lbs)
Qty. / Ctn.	2 pieces	Qty. / Ctn.	2 pieces





MAXIMUS-4FT

- 2.8 μ mol/J, 1792 μ mol/s total output
- SAMUNG LM301B, LM301H, OSRAM 660nm LED
- Inventronics/MEAN WELL driver
- Knob dimming+RJ port dimming 0%-100%
- Fanless Design
- High Yield: > 2 grams per watt
- Industry leading 5/7 years warranty

43

Details

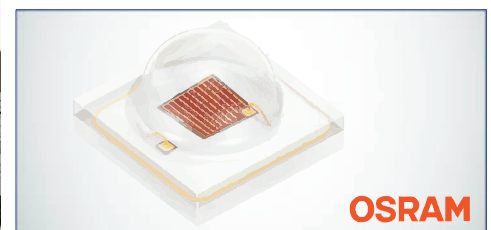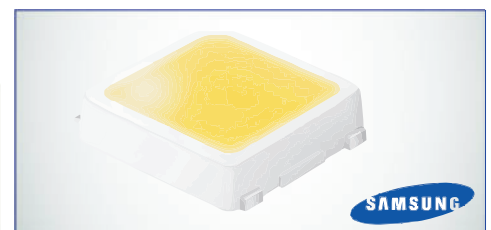


Technical Specifications

Fixture	MAXIMUS -4FT		
Voltage Option	120V	240V	277V
Plug Type	NEMA 5-15P	NEMA 6-15P	OPEN END CABLE
Input Voltage +/- 10%	120 Volts	240 Volts	277 Volts
Input Wattage +/- 5%	640 Watts	640 Watts	640 Watts
Input current at 100%	5.45 Amps	2.9 Amps	2.5 Amps
Power Factor	0.99	0.95	0.95
Dimension	47.24" X 3.02" X 3.76"(L 120 X W 7.66 X H 9.55CM)		


LED Driver	INVENTRONICS MEAN WELL	LED Configuration	4000K & 660nm
Surge Protection	4KV	LED Brand	SAMSUNG & OSRAM
Dimming	Knob dimming	Beam Angle	110 Degree
Dimming	RJ 14 port	PPF	1,728 μmol/s~1792 μmol/s
Power Cord Length	6' (1.83M)	PPE	2.7μmol/J ~2.8 μmol/J
Max. Ambient Temp.	95°F/35°C	Warranty	5~7 Years

Spectrum


MAXIMUS-4FT
4000K+660nm

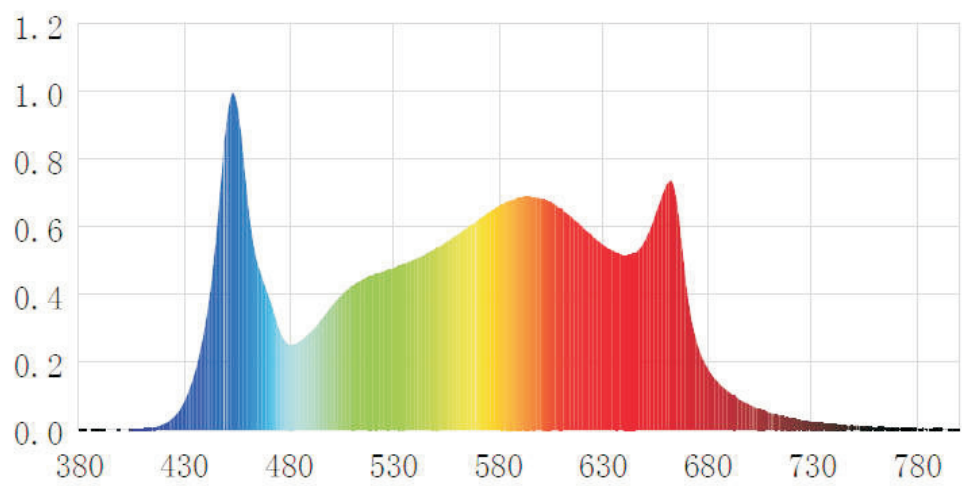


• Knob+RJ14 Port dimming

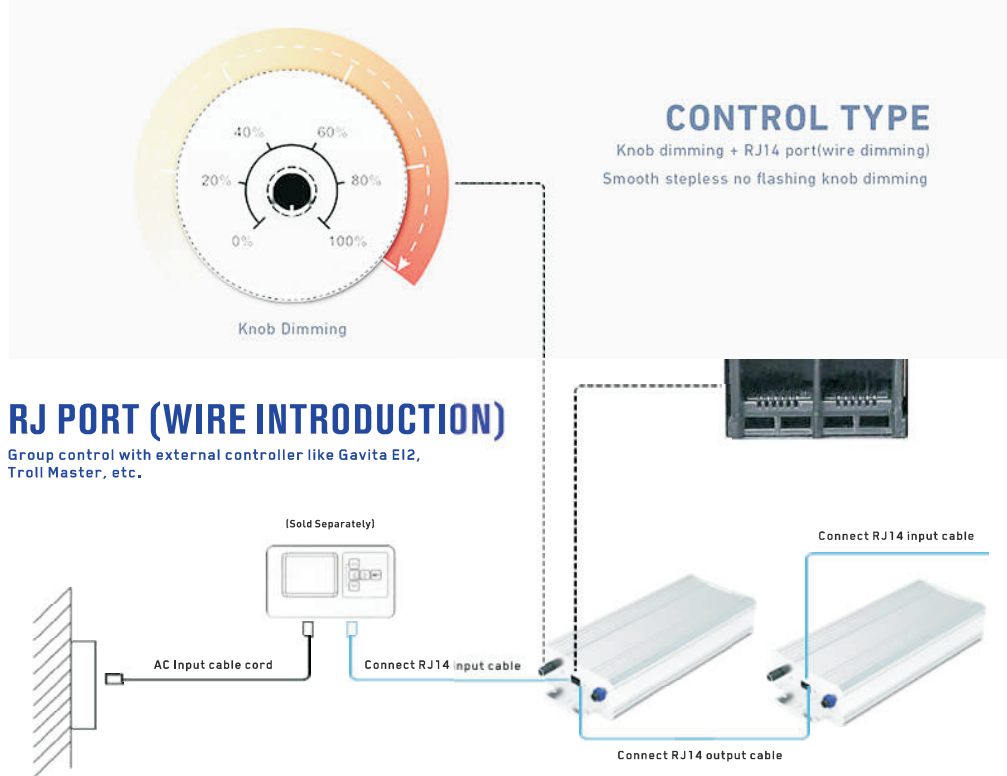

• Dimension & Weight

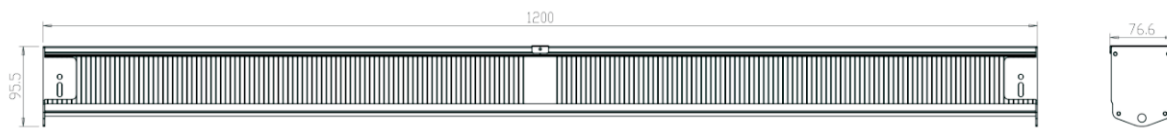

Fixture Dimension:
(L) 120cm X (W) 7.66cm X (H) 9.55cm
(47.24" X 3.02" X 3.76")

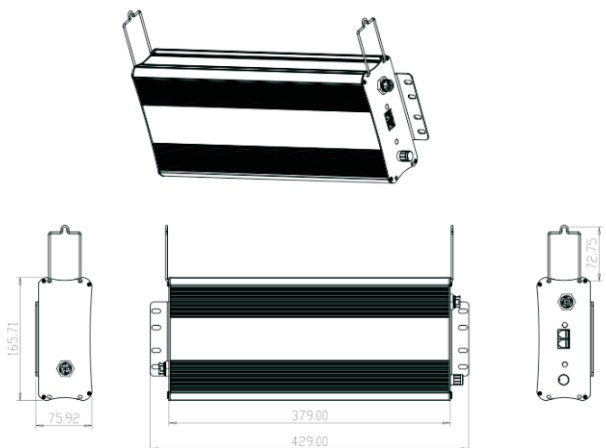

Power Supply Dimension:
(L) 43cm X (W) 17cm X (H) 7.6cm
(16.93" X 6.69" X 2.99")

Power Supply Weight:
10.8 lb/4.9kg (640W)

• Package

Luminaire (Maximus-4FT)		Driver Box (Maximus-4FT)	
Carton Size	128cm X 26cm X 19cm 50.39" X 10.24" X 7.48"	Carton Size	55cm X 53cm X 18cm 21.65" X 20.87" X 7.09"
Weight	11 kgs (24.25 lbs)	Weight	12.5 kgs (27.56 lbs)
Qty. / Ctn.	2 pieces	Qty. / Ctn.	2 pieces