



UVA Bar

- Built-in driver
- Knob dimming and RJ port dimming
- Daisy-chaining up to 49 lights
- Suspending hooks and plug & play connectors for easy installation
- IP66 rating for water proof
- 3 years warranty




Specifications

Typical Input Power	30W / 50W	
Input Voltage & Frequency	120~277Vac & 50/60Hz	
Max. Input Current	30W	50W
	0.264A (120Vac)	0.44A (120Vac)
	0.139A (240Vac)	0.232A (240Vac)
	0.121A (277Vac)	0.2A (277Vac)
Peak Wavelength	385nm	
Fixture Life Time	>30,000hrs	
Max. Ambient Temp.	35°C (95°F)	
Power Factor	>0.9	


Daisy-chaining (Through Wiring)	30W	50W
	Max. 22 units (120Vac)	Max. 13 units (120Vac)
	Max. 43 units (240Vac)	Max. 25 units (240Vac)
	Max. 49 units (277Vac)	Max. 30 units (277Vac)

Waterproof Rating	IP66
Power Cord & Plug Type	4ft AWG #18 (NEMA 5-15P)
Manufacturer's Warranty	3 years limited

Spectrum (SPD)

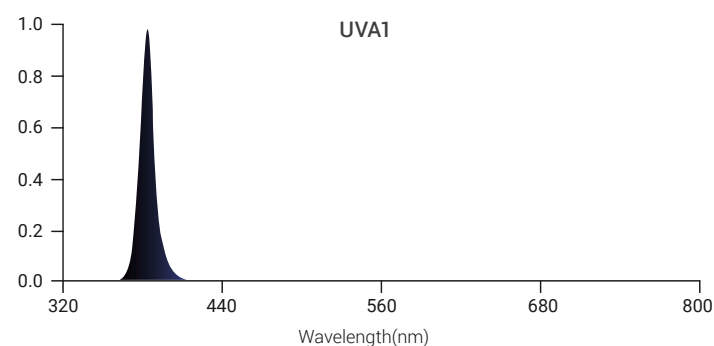

Dimensions (mm / ")



Packaging

Carton Size	73cm × 29cm × 22cm 28.7" × 11.4" × 8.7"
Weight	24.48lbs (11.11kg)
Qty./Ctn.	8 units (4 Pairs) Sold per pair

